




Nexus

CAN BUS IoT GATEWAY

# Diaboard

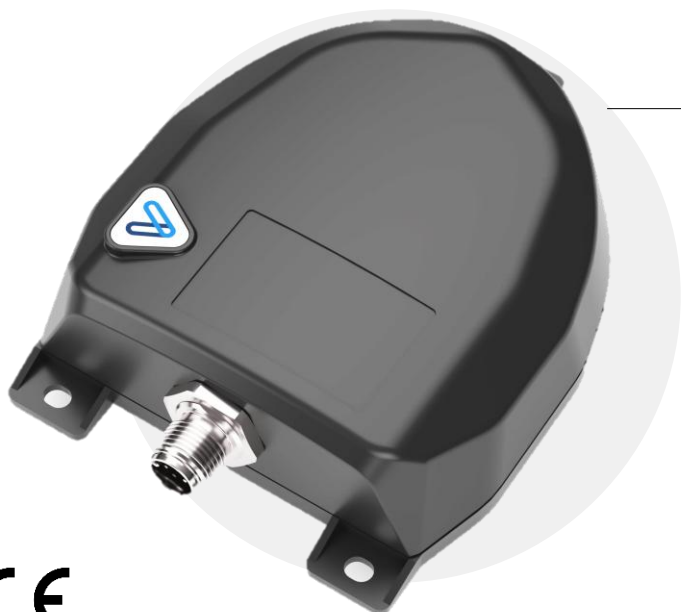

- Rugged IoT Gateway for DIABOARD cloud portal data transmission
- With GPS trace signal
- 4G LTE communication with
- M2M Multi-network SIM card
- WiFi connection
- Bluetooth connection for device configuration
- Integrated antennas
- Cyber security
- Designed for machines and equipment equipped with a CAN BUS network

## TECHNICAL DATA

	BASIC VERSION	FULL VERSION
<b>POWER SUPPLY</b>	9-30 VDC	
<b>BACKUP BATTERY</b>	NO	YES
<b>CAN BUS PORT</b>	x2 CAN BUS 2.0 A/B COMPLIANT – (11, 29 BIT) – ISO 11898-2 UP TO 1Mbit/s Compatible sniffing protocol: CANOPEN – J1939	
<b>4G LTE cat.1</b>	LTE Frequency band [MHz]: <ul style="list-style-type: none"> <li>• Europe: LTE-FDD: B1/3/7/8/20; GSM: B3/8</li> <li>• America: LTE-FDD: B2/3/4/5/7/8/28/66; GSM: B2/3/5/8</li> <li>• Europe-Asia: LTE-FDD: B1/3/7/8/20/28; GSM: B3/8</li> </ul>	
<b>2G EDGE GPRS</b>	Data Transmission: <ul style="list-style-type: none"> <li>• LTE data rate (Mbps): Max. 10 (DL)/Max. 5 (UL)</li> <li>• EDGE data rate (Kbps): Max. 236.8 (DL)/Max. 236.8 (UL)</li> <li>• GPRS data rate (Kbps): Max. 85.6 (DL)/Max. 85.6 (UL)</li> </ul>	
<b>GPS</b>	GPS + BeiDou + Galileo ACCURACY: 10m (with optimum signal conditions)	
<b>WIFI</b>	NO	IEEE 802.11 b/g/n Frequency Band: 2.4GHz
<b>BLUETOOTH</b>	NO	BT 5.2
<b>SENSORS</b>	NO	Shock and acceleration detection
<b>BLACK BOX</b> Data storage in case of signal absence	Optional	128MB internal flash memory
<b>STATUS INDICATION</b>	No. 3 leds lights	
<b>TEMPERATURE</b>	OPERATIVE: -35+75°C STORAGE: -40+80°C BATTERY (TEMP): -20°C+60°C	



(20/02/2026) - 1




Nexus

CAN BUS IoT GATEWAY

**ELECTRONIC FEATURES**

<b>SIM CARD</b>	Included micro-SIM card <ul style="list-style-type: none"> <li>• Non-steered roaming SIM with worldwide coverage</li> <li>• M2M Multi-network SIM card</li> </ul>
<b>FIRMWARE UPDATE</b>	OTA system update via OTA-CAN BUS included
<b>WEB INTEGRATION</b>	Data collected by communication ports are displayed on the DIABOARD portal (MQTT)
<b>CYBER SECURITY</b>	<ul style="list-style-type: none"> <li>• Encrypted communication between gateway and portal</li> <li>• On board authentication and secure data management services</li> </ul>
<b>IGNITION KEY</b>	digital input for switch ON/OFF management

**SIZE (mm)**

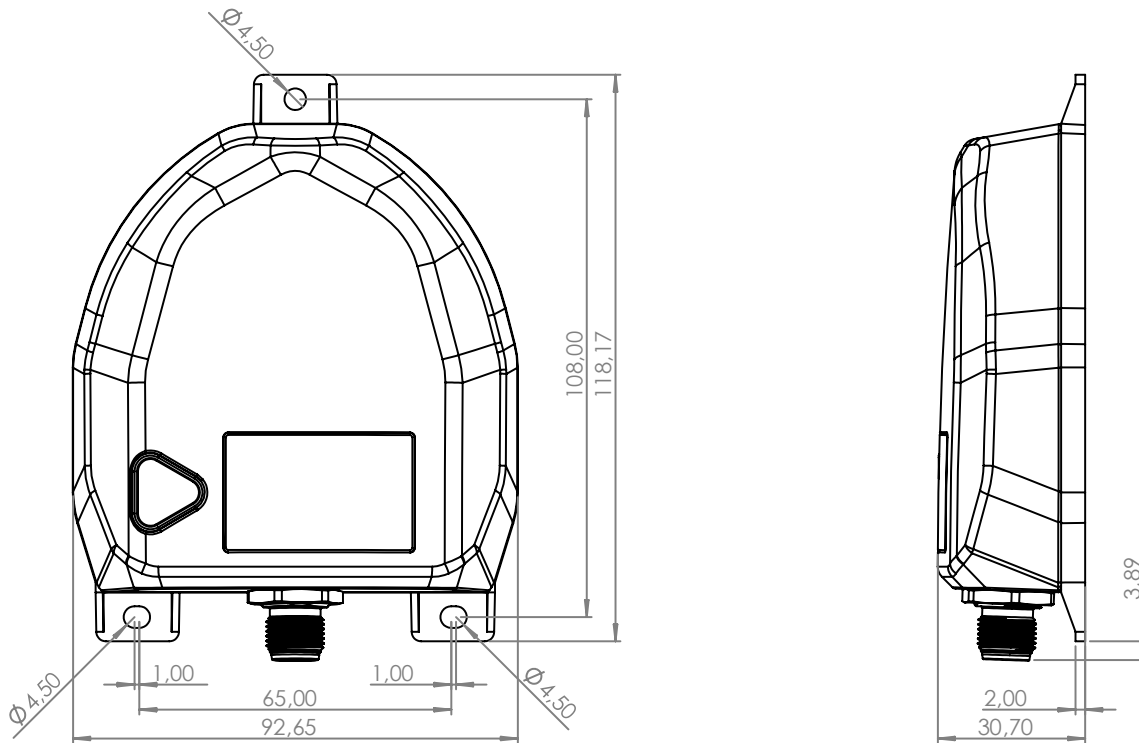


**ELECTRICAL CONNECTION - pinout**

<b>CONNECTOR TYPE</b>	M12 8 pin male connector	
<p>Front connector side</p>	<b>+V</b>	+ POWER SUPPLY
	<b>C2H</b>	CAN 2 H
	<b>C1H</b>	CAN 1 H
	<b>C2L</b>	CAN 2 L
	<b>IGN</b>	IGNITION KEY
	<b>GND</b>	GROUND
	<b>GND</b>	GROUND
	<b>C1L</b>	CAN 1 L



**INTEGRATED ANTENNA LOCATIONS**

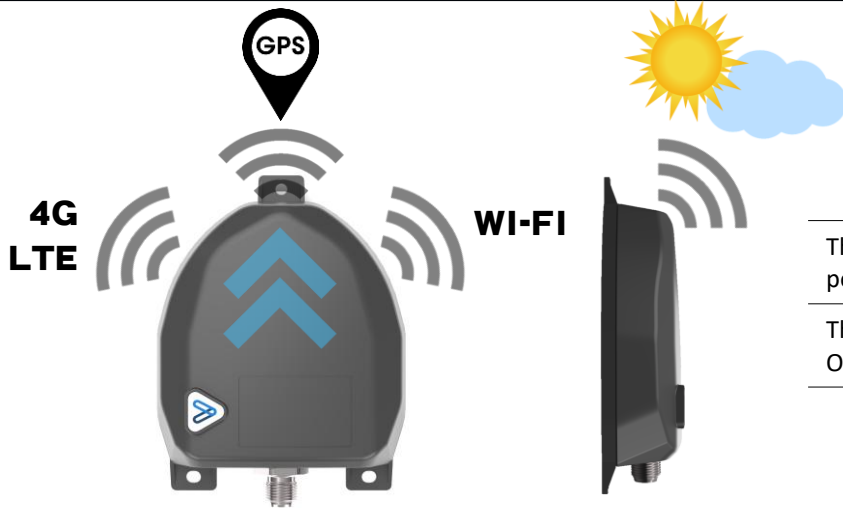

The device shall be installed with the antenna surfaces pointing UP

The GPS reception is optimized for outdoor installation. Otherwise, external antenna required.

**AVAILABLE ON REQUEST**

<b>EXTERNAL GPS ANTENNA</b>	External connector for wired rugged antenna for indoor or cabin installation
<b>SMS communication</b>	Optional: SMS Configuration, Events, DOUT control, Debug
<b>PROTOCOLS INTEGRATION</b>	<ul style="list-style-type: none"> <li>OBDII</li> <li>CAN FD</li> <li>custom on request</li> </ul>

**STANDARDS**

<b>APPROVAL</b>	<ul style="list-style-type: none"> <li>CE RED</li> <li>On request: FCC</li> </ul>
<b>Health and safety - Article 3.1(a)</b>	<ul style="list-style-type: none"> <li>EN IEC 62368-1:2020 + A11:2020</li> <li>EN 50665:2017</li> <li>EN IEC 62311:2020</li> </ul>
<b>Electromagnetic compatibility - Article 3.1(b)</b>	<ul style="list-style-type: none"> <li>EN 301 489-1 V2.2.3</li> <li>EN 301 489-17 V3.2.4</li> <li>EN 301 489-19 V2.2.0</li> <li>EN 301 489-52 V1.1.2</li> <li>EN 55032:2015+A11:2020</li> <li>EN 55032:2017+A11:2020</li> </ul>
<b>Efficient use of radio spectrum - Article 3.2</b>	<ul style="list-style-type: none"> <li>EN 301 511 V12.5.1</li> <li>EN 301 908-1 V13.1.1</li> <li>EN 301 908-13 V13.1.1</li> <li>EN 300 328 V2.2.2</li> <li>EN 303 413 V1.2.1</li> </ul>
<b>ENVIRONMENTAL TESTING</b>	<ul style="list-style-type: none"> <li>IEC 60068-2-64</li> <li>IEC 60068-2-27</li> <li>IEC 60068-2-27</li> <li>IEC 60068-2-30</li> </ul>
<b>PROTECTION</b>	IEC 60529 (IP67)



NOTE